

# ASSEMBLY INSTRUCTIONS
















PAGE: 1/6




MODEL : HMZ-FN-DC-7716-WT

Before you begin, please follow assembly instructions carefully, then follow them step by step.

Read instruction carefully . See Furniture Parts list and Hardware List for guidance . Be sure you have all parts before you start assembling .  
Place and assemble furniture on a clean flat soft surface , such as carpet or rug to prevent being scratched .

| PART LIST |                    | QTY   |
|-----------|--------------------|-------|
| 1         | TOP PANEL          | 1 PC  |
| 2         | BOTTOM PANEL       | 1 PC  |
| 3         | SIDE PANEL (L)     | 1 PC  |
| 4         | SIDE PANEL (R)     | 1 PC  |
| 5         | CENTER PANEL       | 1 PC  |
| 6         | BONE PANEL         | 4 PCS |
| 7         | DOOR PANEL (L)     | 2 PCS |
| 8         | DOOR PANEL (R)     | 2 PCS |
| 9         | BACK PANEL         | 1 PC  |
| 10        | APRON BONE (FRONT) | 1 PC  |
| 11        | APRON BONE (BACK)  | 1 PC  |
| 12        | APRON BONE         | 2 PCS |
| 13        | CENTER LEG         | 1 PC  |
| 14        | DRAWER FRONT       | 2 PCS |
| 15        | DRAWER BACK        | 2 PCS |
| 16        | DRAWER SIDE        | 4 PCS |
| 17        | DRAWER BOTTOM      | 2 PCS |

| HARDWARE |                                 |   |  |         |  |
|----------|---------------------------------|---|--|---------|--|
| A        | MINI FIX                        | A1  A2  A3  |  | 10 SETS |  |
| B        | M8 X 30MM WOOD DOWEL            |    |  | 32 PCS  |  |
| C        | M6 X 60MM<br>CSK CAP WOOD SCREW |    |  | 6 PCS   |  |
| D        | ALLEN KEY M4                    |    |  | 1 PC    |  |
| E        | M3.5 X 16MM C.B SCREW           |    |  | 79 PCS  |  |
| F        | M4 X 30MM C.B SCREW             |    |  | 2 PCS   |  |
| G        | M4 X 38MM C.B SCREW             |    |  | 28 PCS  |  |
| H        | 5/8 NAIL                        |    |  | 52 PCS  |  |
| I        | 5/8 PVC NAIL LEG                |    |  | 5 PCS   |  |
| J        | SOFT CLOSING 5/8 HINGES         |    |  | 8 PCS   |  |
| K        | 14" DRAWER SLIDE                |  K1 ( L/R )<br> K2 ( L/R )  |  | 2 SETS  |  |
| L        | ONE HOLE L BRACKET (2MM)        |    |  | 4 PCS   |  |

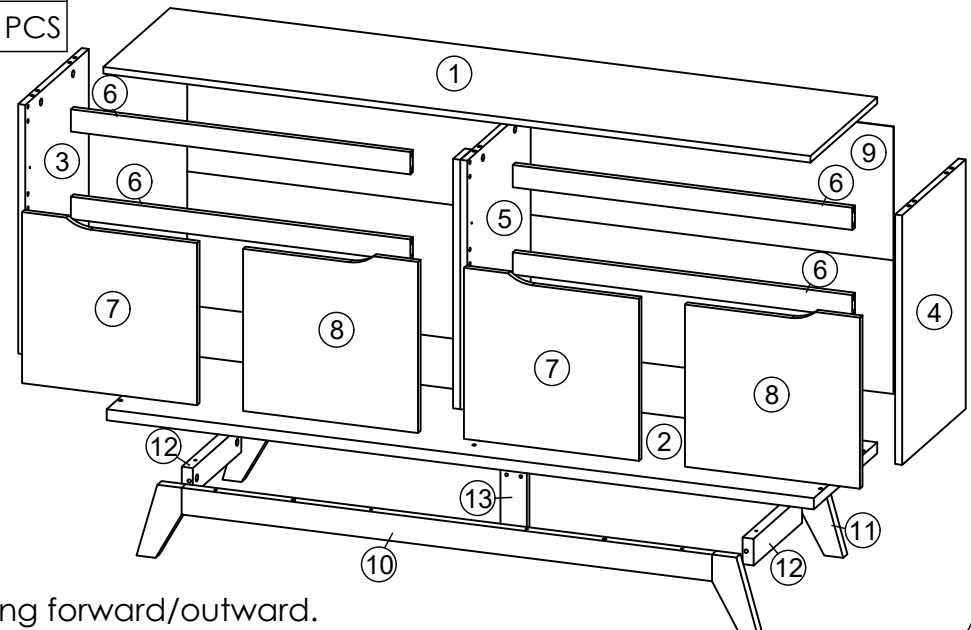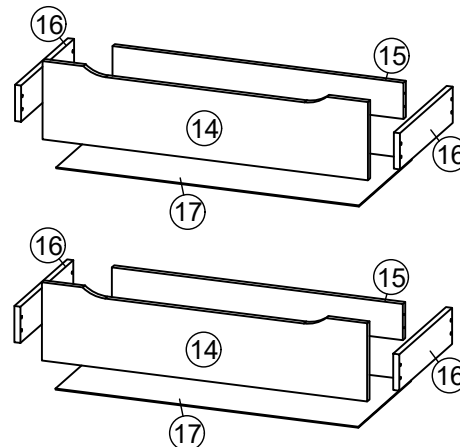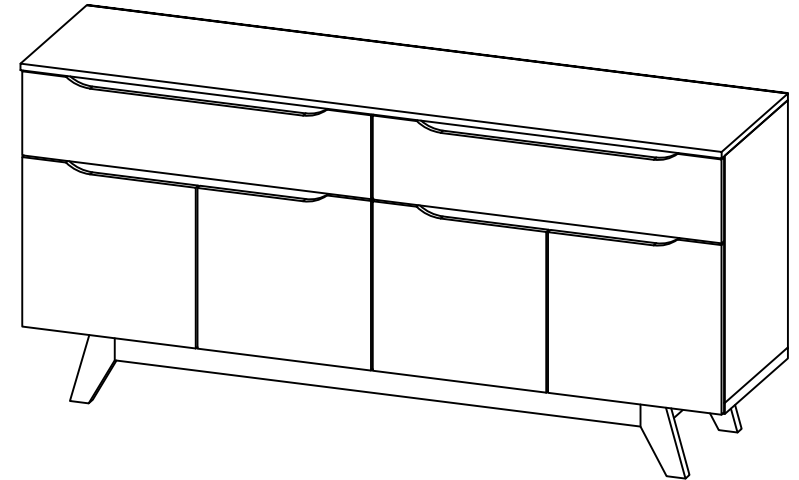

**SELF-PREPARED TOOLS:** Tools below are NOT included in package.



SCREWDRIVER



HAMMER

## Reminder:


Please ensure that all surfaces and edges with colours/laminations are facing forward/outward.

# ASSEMBLY INSTRUCTIONS

PAGE: 2/6

## STEP 1


- Insert hardware **A1** onto panel (3), (4), (5) and (12).  
(Repeat 10 times.)
- Insert hardware **A2** onto panel (1).  
(Repeat 6 times.)
- Insert hardware **B** onto panel (3), (4) and (5).  
(Repeat 12 times.)

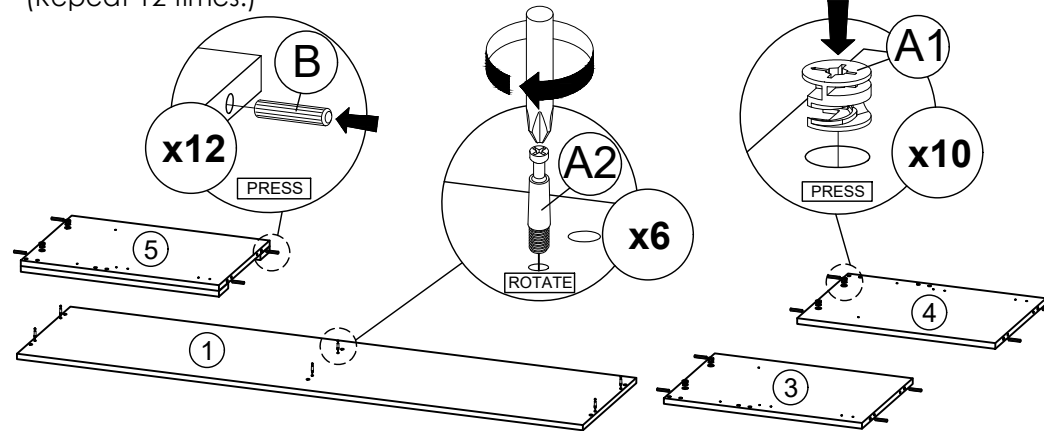

\* Ensure the arrows on hardware **A1** point towards mounting positions.

## STEP 3


- Fix hardware **K1 (L/R)** into panel (3), (4) and (5) with hardware **E**.  
(Repeat 3 times for each hardware.)

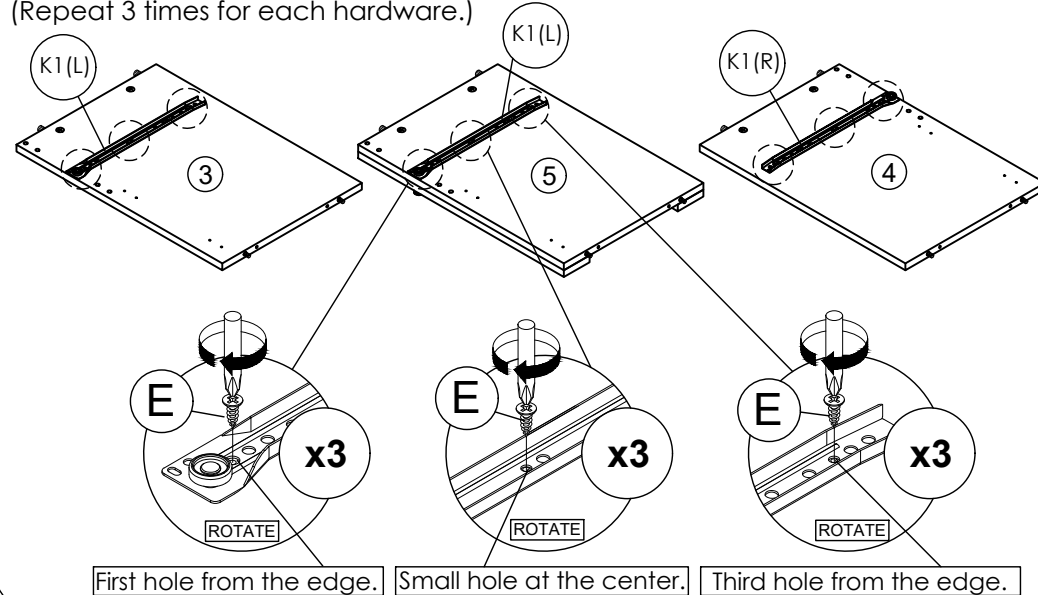

# MODEL : HMZ-FN-DC-7716-WT


## STEP 2

- Assemble hardware **L** onto two of the panel (6) with hardware **E**.  
(Repeat 4 times.)
- Insert hardware **A2** onto panel (10) and (11).  
(Repeat 4 times.)
- Insert hardware **B** onto panel (6), (10) and (11).  
(Repeat 20 times.)

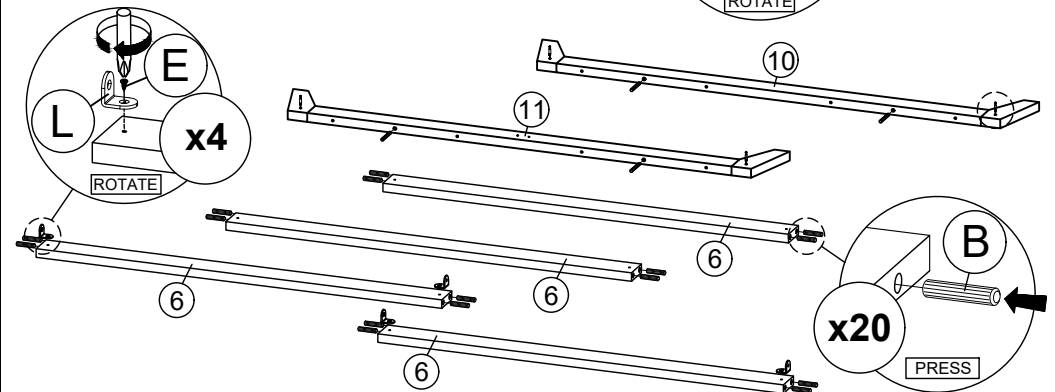

## STEP 4

- Fix hardware **K1 (R)** into panel (5) with hardware **E**.  
(Repeat 2 times for each hardware.)

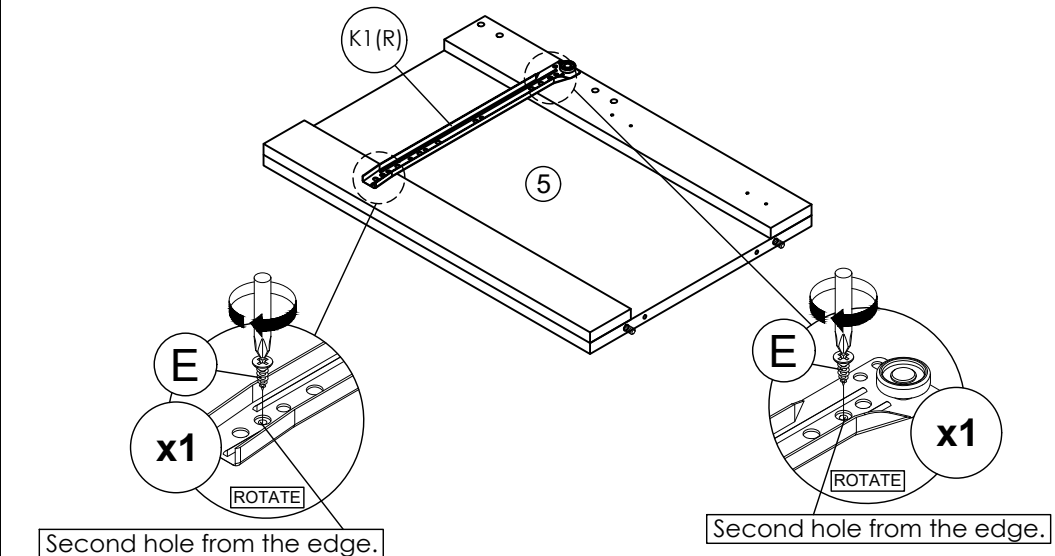


# ASSEMBLY INSTRUCTIONS

PAGE: 3/6

## STEP 5



- Attach panel **(6)** to panel **(3)**, **(4)** and **(5)**.  
(Repeat 4 times.)
- Assemble hardware **L** from panel **(6)**  
to panel **(3)**, **(4)** and **(5)** with hardware **E**.  
(Repeat 4 times.)

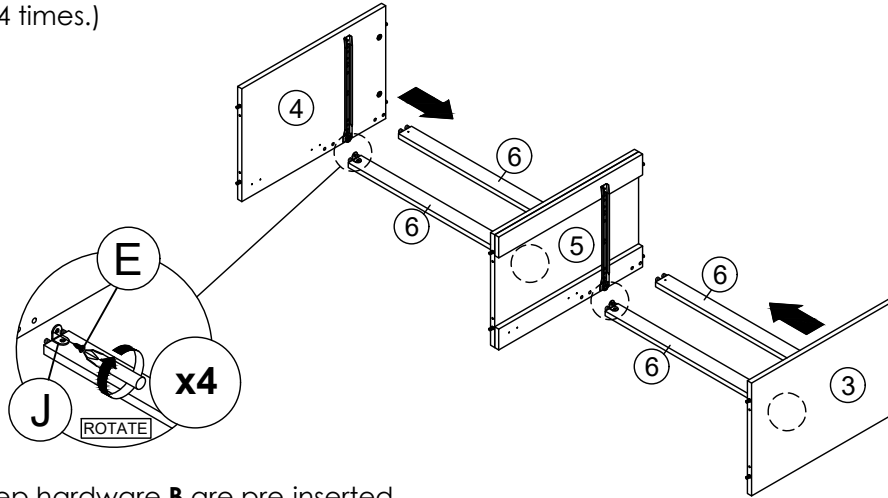

\* In this step hardware **B** are pre-inserted.

## STEP 7

- Connect panel **(2)** to panel **(3)**, **(4)** and **(5)**  
by using hardware **C** and **D**.  
(Repeat 6 times.)

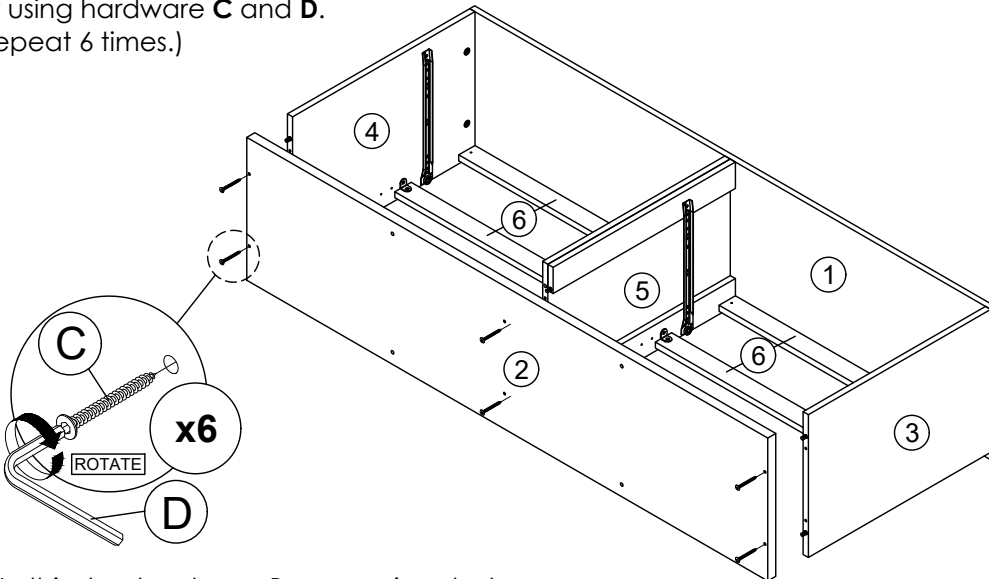

\* In this step hardware **B** are pre-inserted.


# MODEL : HMZ-FN-DC-7716-WT

## STEP 6

- Attach panel **(1)** to panel **(3)**, **(4)** and **(5)**.
- Insert all hardware **A2** into **A1**.
- Rotate all **A1** until tight.
- Apply **A3** onto all **A1**.  
(Repeat 6 times.)



OR

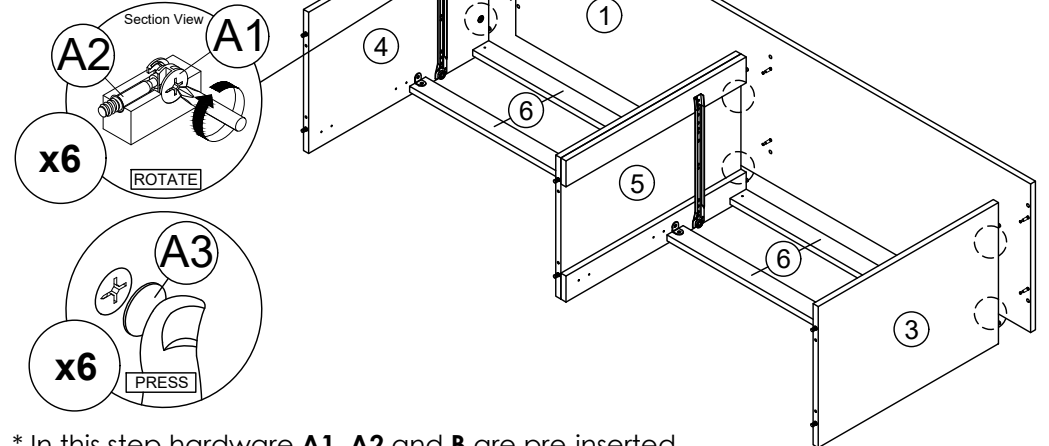


\* In this step hardware **A1**, **A2** and **B** are pre-inserted.

## STEP 8

- Attach panel **(10)** and **(11)** to panel **(12)**.
- Insert all hardware **A2** into **A1**.
- Rotate all **A1** until tight.
- Apply **A3** onto all **A1**.  
(Repeat 4 times.)



OR

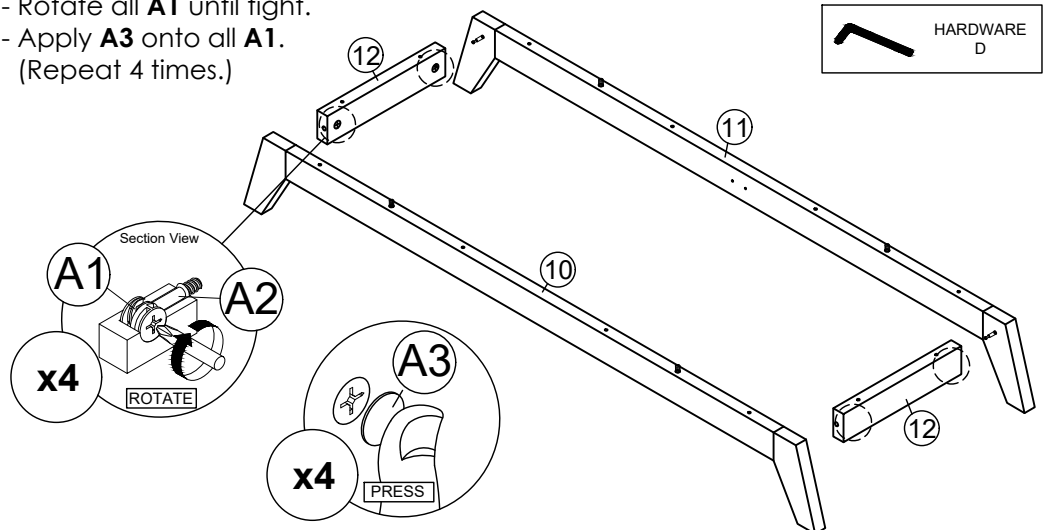

\* In this step hardware **A1**, **A2** and **B** are pre-inserted.


# ASSEMBLY INSTRUCTIONS

PAGE: 4/6

MODEL : HMZ-FN-DC-7716-WT


## STEP 9

Assemble panel **(13)** with panel **(11)** by using hardware **F**.  
(Repeat 2 times.)

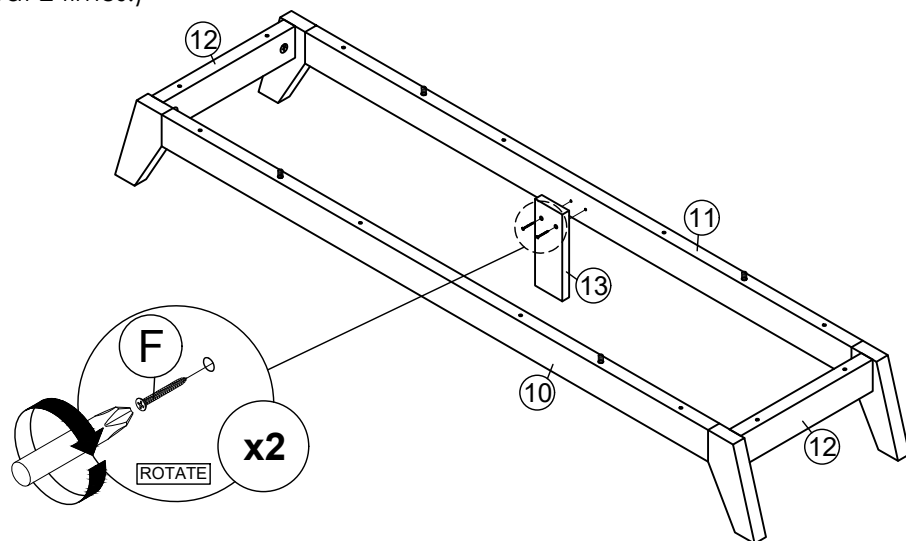


## STEP 10

Assemble panel **(10)**, **(11)** and **(12)** with panel **(2)**  
by using hardware **G**.  
(Repeat 12 times.)

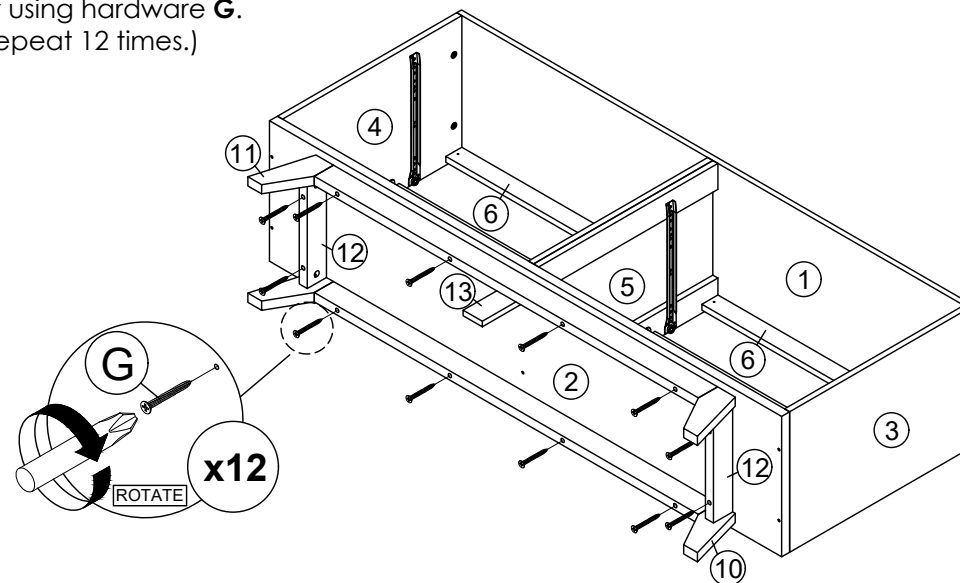



## STEP 11

- Assemble panel **(9)** to entire body with hardware **H**.  
(Repeat 28 times.)
- Hit hardware **I** into bottom of panel **(10)**, **(11)** and **(13)**.  
(Repeat 5 times.)

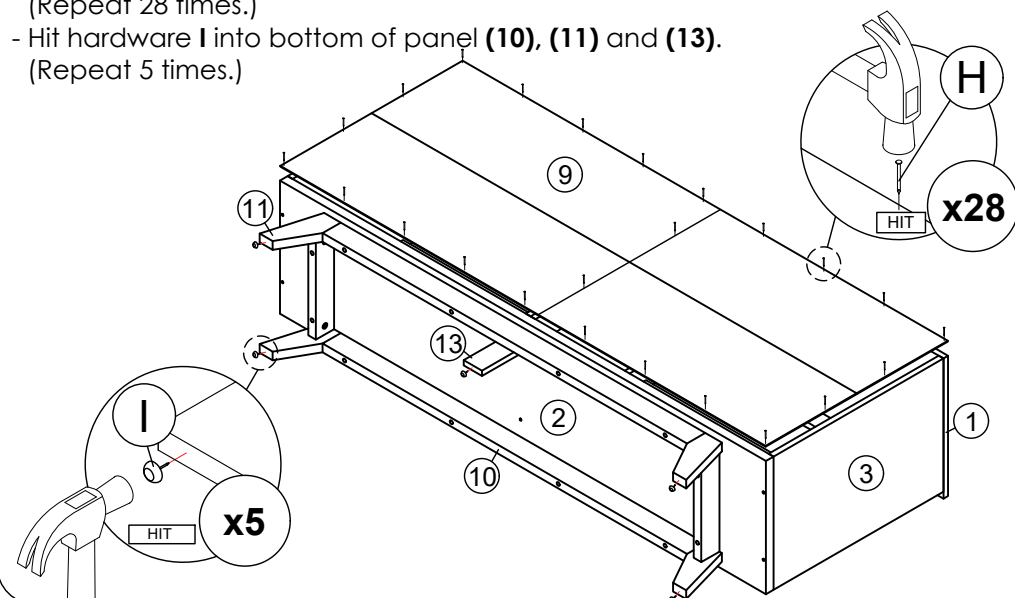

## STEP 12

Fix hardware **J** onto panel **(7)** and **(8)** by using hardware **E**.  
(Repeat 2 times for each hardware.)

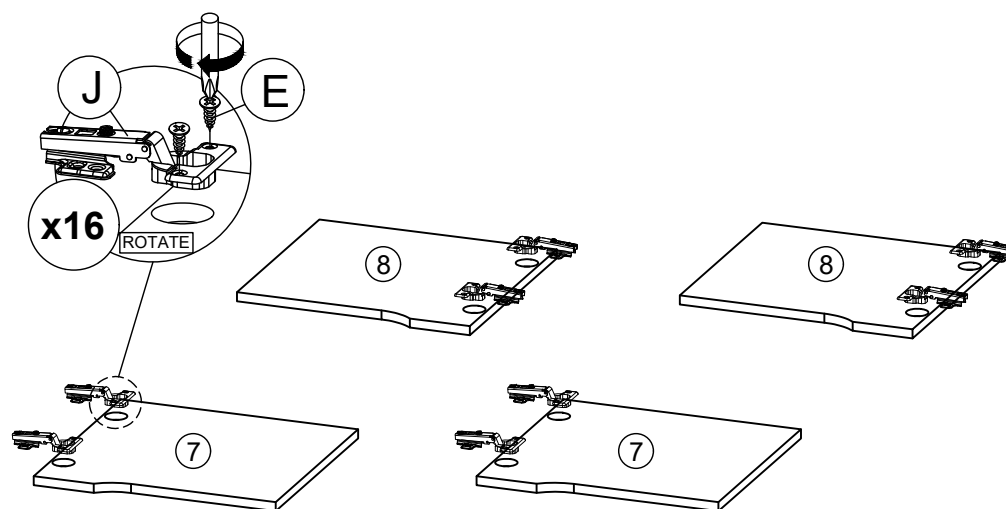


# ASSEMBLY INSTRUCTIONS

PAGE: 5/6

## STEP 13


- Fix hardware **J** into panel **(3)**, **(4)** and **(5)** by using hardware **E**.  
(Repeat 4 times for each hardware.)
- Tighten or loosen the screw to adjust position of panel **(7)** and **(8)**.  
(Do only when needed.)

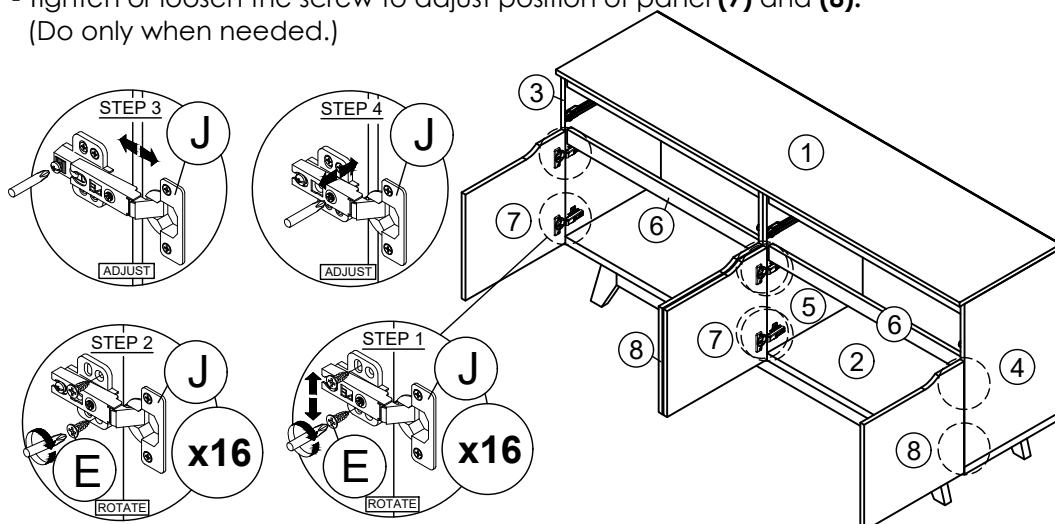

\* In this step hardware **J** have been assembled in panel **(7)** and **(8)**.

## STEP 15


- Assemble panel **(17)** to entire body with hardware **H**.  
(Repeat 24 times.)

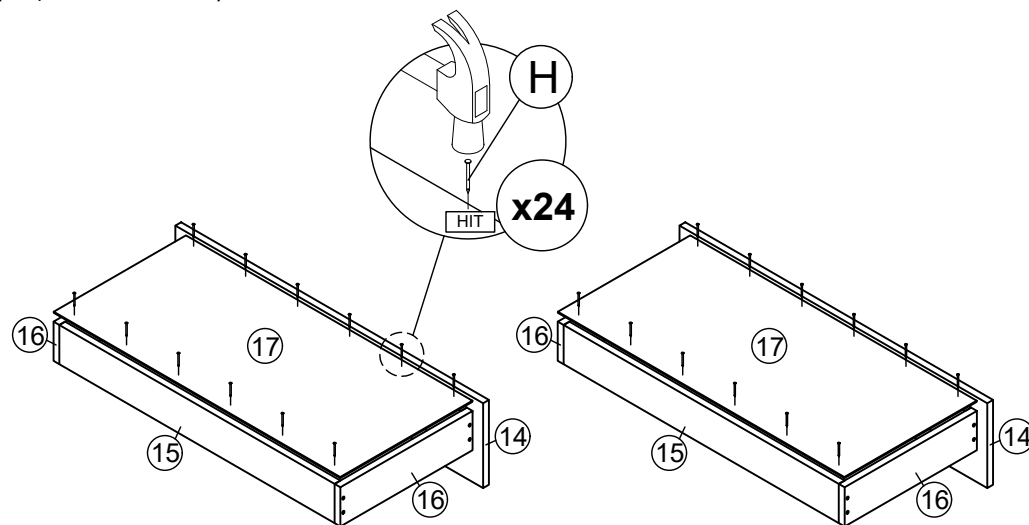

# MODEL : HMZ-FN-DC-7716-WT


## STEP 14

- Assemble panel **(16)** to panel **(14)** and **(15)** by using hardware **G**.  
(Repeat 16 times.)

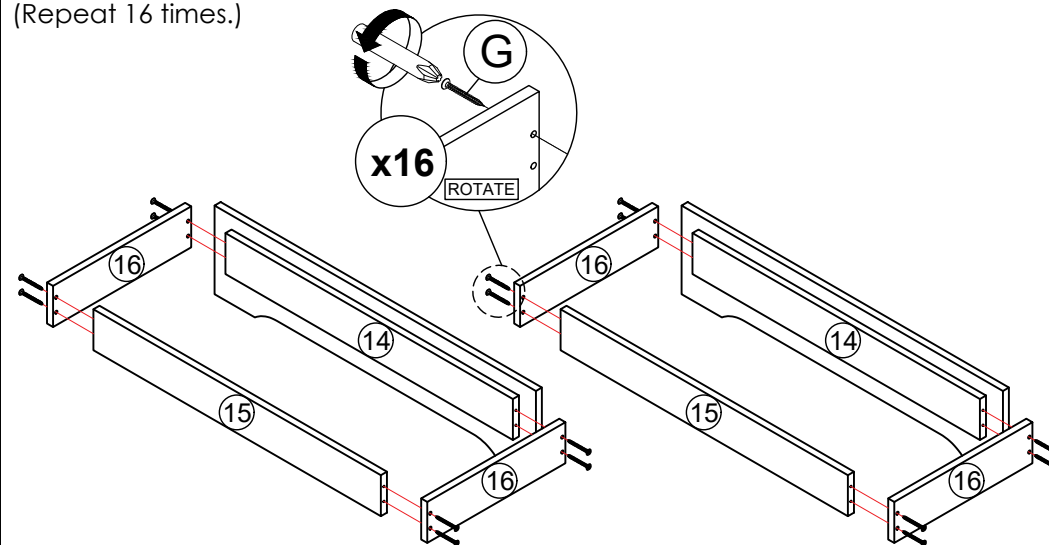

## STEP 16

- Assemble hardware **K2 (L/R)** to panel **(17)** by using hardware **E**.  
(Repeat 3 times for each hardware.)

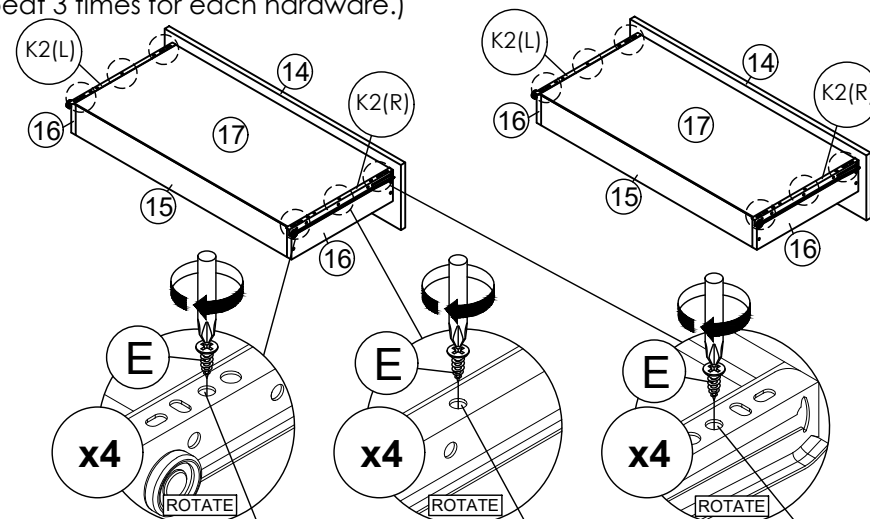

Third hole from the edge.

Hole at the center.

Third hole from the edge.

\*Hardware **K2 (L/R)** shall be leaning against panel **(14)** when assembling.

## STEP 17

Put all the drawer in place along the drawer slides.

