


# GLIDER CHAIR WITH FOOTSTOOL











Model: BABY-GC-05T-XX

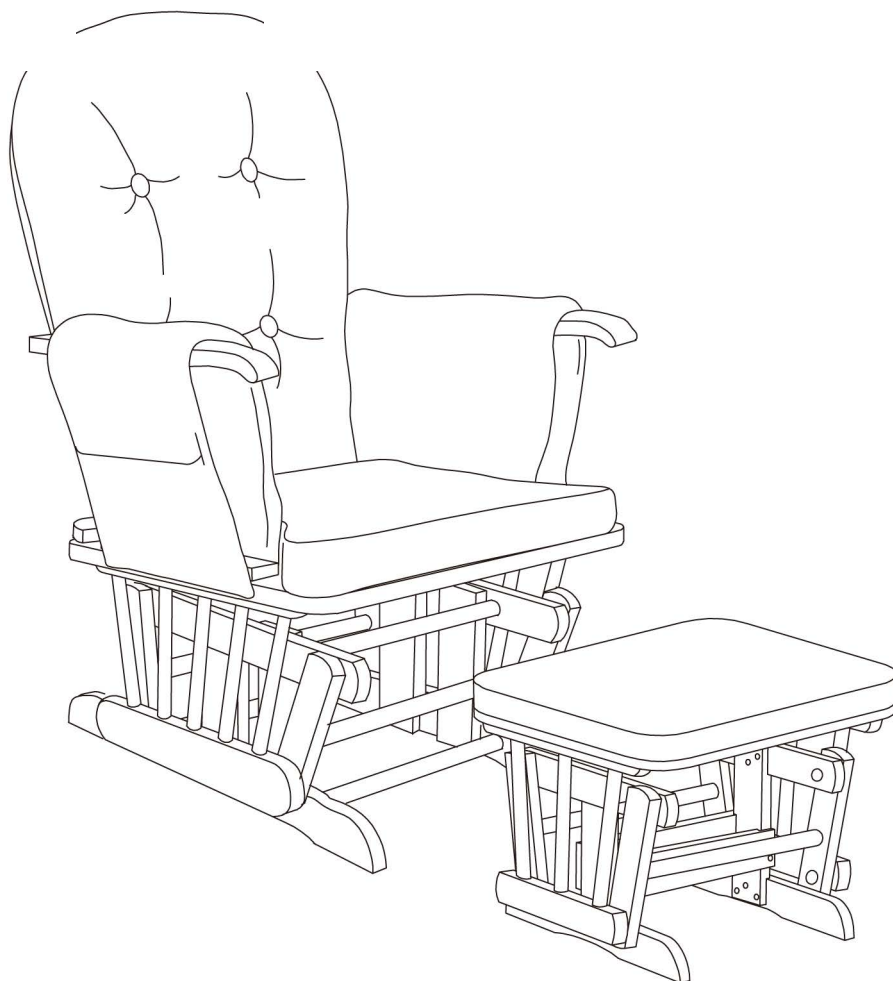





## WARNING CAUTION

- 1.This product contains bolts and other small parts that may present a choking hazard for children 3 years or under.This unit must be assembled by an adult.
- 2.periodically check the safety of your product by making certain all bolts and nuts are tightened securely.

### CHAIR COMPONENT PARTS


A	1 PCS	B	2 PCS	C	2 PCS	D	2 PCS	E	1 PCS	F	1 PCS	G	1 PCS
Backrest		Armrest		Armrest Underprop		Arms Cushion		Chair Base		Backrest Cushion		Seat Cushion	
													
								I	1 PCS	J	1 PCS	O	1 PCS
								Ottoman Base		Ottoman Panel		Ottoman Cushion	
													

### PARTS LIST

H	10 PCS	K	2 PCS	L	2 PCS	M	1 PCS
							
35mm Bolts		45mm screw and nut		Nut		Allen Key	


## STEP 1

Place the back frame A on the base E and align the holes in the back frame with the holes on the base. Use the screw H in each of the two holes as shown and tighten with allen key M.

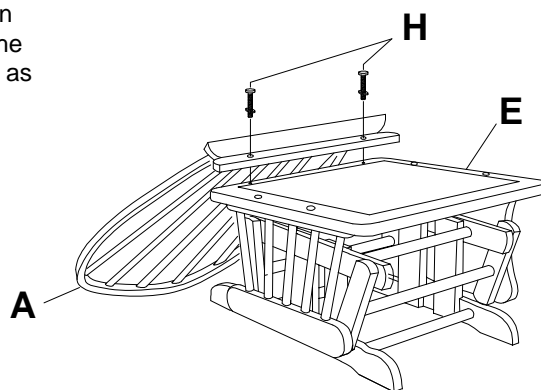


## STEP 2

- 2-1 Assembling Step 1 at first then use bolt H fixed the C onto the base E, please noted the bevel edge should face to the front( see the amplificatory picture).
- 2-2 Put armrest part B at the location 1 and then turn it to location 2.

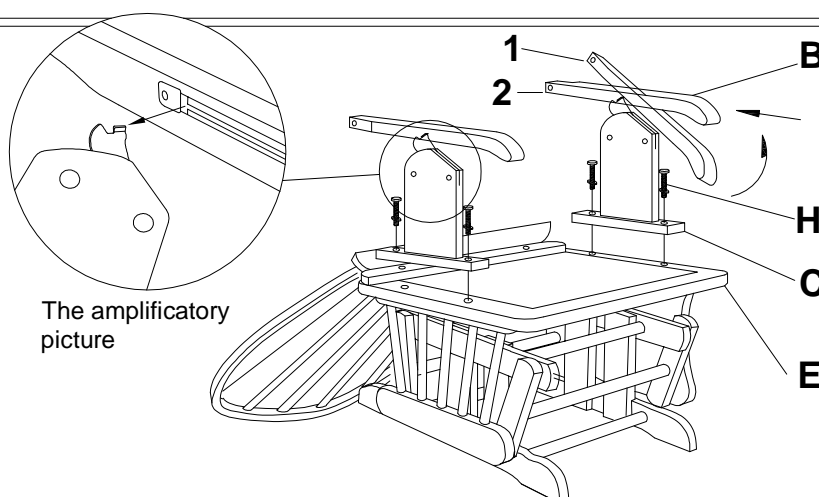

## STEP 3

Put nut L in the arm rest B. Use screw K to joint A and B as right diagram (for B the round part should facing front). Check to make sure all screw are tight. (please note the straight side of the arm rest Part B should be positioned on the inside of the chair and the curved side of the armrest where part K inserted should be on the outside).

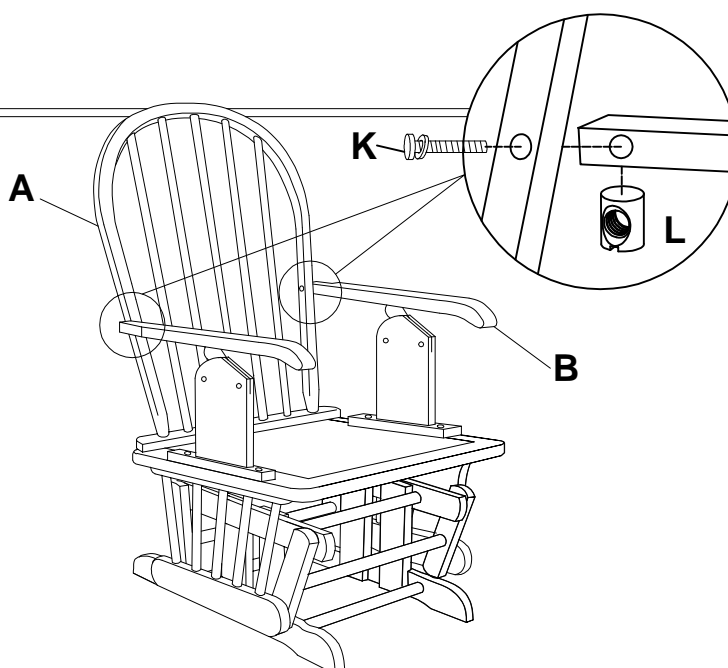


## STEP 4

Attach the arms cushion to the arms frames by the velcro.




## STEP 5

Attach the seat cushion.

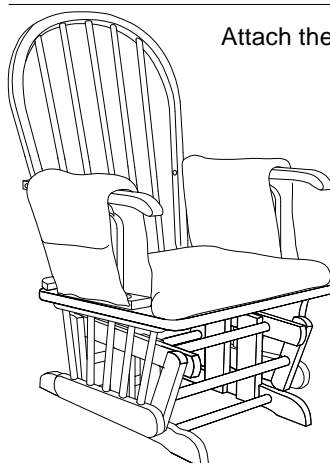

## STEP 6

Put back cushion on the backrest . The two belts on the top of the backside of the back cushion should tied onto the bentwood , the other belts could tied on pole of the backrest.

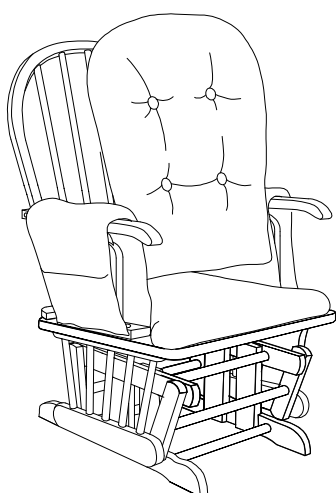

## STEP 8

Use the screw H to tight ottoman base and ottoman panel. then put the ottoman cashion on the panel.

